


STANDARD CONSTRUCTION DETAIL # 3-1

Rock Construction Entrance

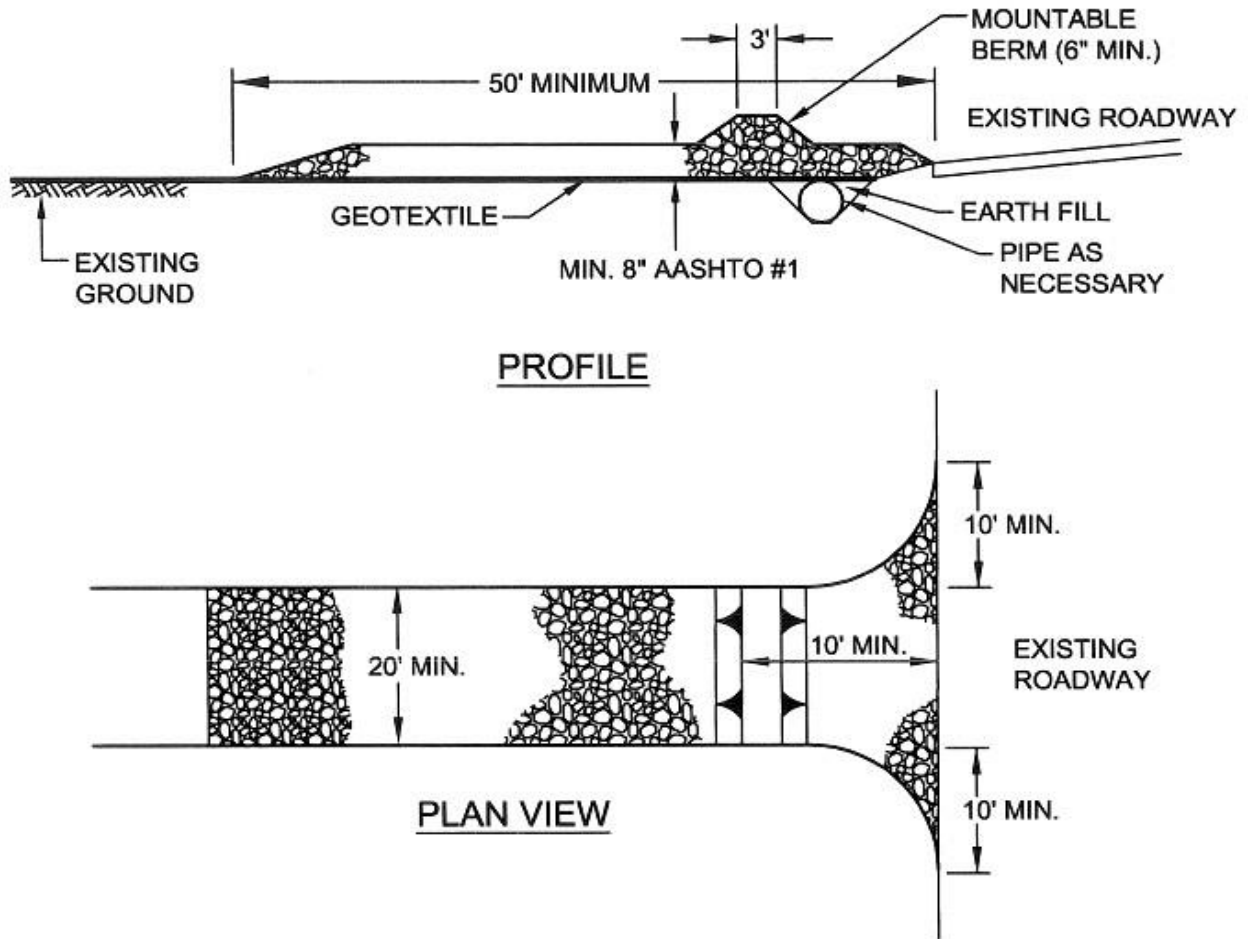

Topsoil should be removed prior to installation of Rock Construction Entrance.

Extend rock over full width of entrance.

Runoff shall be diverted from roadway to a suitable sediment removal BMP prior to entering Rock Construction Entrance.

Mountable berm should be installed wherever optional culvert pipe is used. Pipe to be sized appropriately for size of ditch being crossed.

MAINTENANCE: Rock Construction Entrance thickness shall be constantly maintained to the specified dimensions by adding rock. A stockpile shall be maintained on site for this purpose. All sediment deposited on paved roadways shall be removed and returned to the construction site immediately. If excessive amounts of sediment are being deposited on roadway, extend length of Rock Construction Entrance by 50 feet increments until condition is alleviated or install wash rack. Washing the roadway or sweeping the deposits into roadway ditches, sewer, culverts, or other drainageways is not acceptable.